
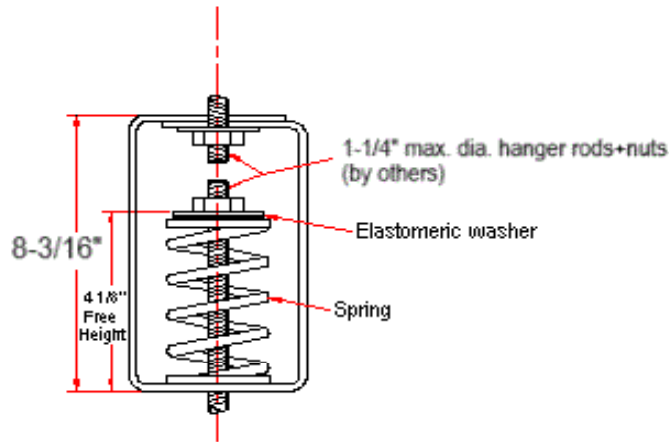




VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz



N.T.S.

NOTES

1. Springs have 50% additional travel to solid beyond rated load.
2. Isolators should be selected in the range of -30% to +25% of rated load.
3. Consult spring chart for isolator performance data.
4. Nuts, washers & rods by others.
5. Contact factory for optional drilling to accept larger hanger rod sizes.

ISOLATOR MODEL	RATED LOAD (lbs)	SOLID LOAD (lbs)
HSG-150	83	125
HSG-151	150	225
HSG-152	216	325
HSG-153	300	450
HSG-154	400	600
HSG-155	500	750
HSG-156	600	900
HSG-157	733	1100
HSG-158	1200	1800
HSG-159	1666	2500

FEATURES

- * Spring elements color-coded for easy field verification
- * Load distribution steel washer

Notes / Remarks :

Project :
Client :
Consultant :
Representative :

Title :

HSG
Spring Hanger
(1" deflection)

Drawing no.
S-2100.06

Rev. 0