


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

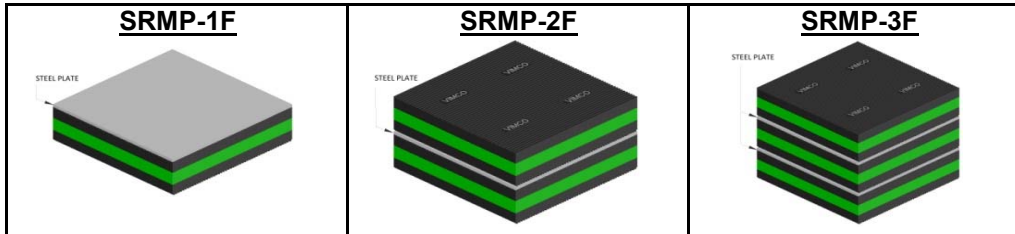

OPTION CODES: (option codes can be combined: e.g. *SRMP-2F-0404-FHQ*)

<p>Suffix code F</p> <p>1/4" top friction pad with steel separator plate (increases total thickness by 5/16")</p> <p>example: <i>SRMP-2F-0404-F</i></p>	<p>Suffix code H</p> <p>3/4" center hole for anchoring</p> <p>example: <i>SRMP-2F-0404-H</i></p>	<p>Suffix code Q</p> <p>1/4" top steel plate in lieu of standard 16 gauge (increases total thickness by 3/16")</p> <p>example: <i>SRMP-3F-0404-Q</i></p>
--	---	---

MODEL	SIZE (inches)	MAX DEFL. (inches)
SRMP-1F 1212	12" x 12" x 1-1/16"	0.25"
SRMP-1F 0808	8" x 8" x 1-1/16"	
SRMP-1F 0606	6" x 6" x 1-1/16"	
SRMP-1F 0404	4" x 4" x 1-1/16"	
SRMP-1F 0303	3" x 3" x 1-1/16"	
SRMP-2F 1212	12" x 12" x 2-1/16"	0.50"
SRMP-2F 0808	8" x 8" x 2-1/16"	
SRMP-2F 0606	6" x 6" x 2-1/16"	
SRMP-2F 0404	4" x 4" x 2-1/16"	
SRMP-2F 0303	3" x 3" x 2-1/16"	
SRMP-3F 1212	12" x 21" x 3-1/8"	0.75"
SRMP-3F 0808	8" x 8" x 3-1/8"	
SRMP-3F 0606	6" x 6" x 3-1/8"	
SRMP-3F 0404	4" x 4" x 3-1/8"	
SRMP-3F 0303	3" x 3" x 3-1/8"	
SRMP-sF ssss *	SPECIAL *	

* Contact factory for more than 3 vibration pad layers and non-standard sizes.

APPLICATION

- * Wherever bolting is to be avoided and minor, non-critical vibration conditions exist. (pumps, motors, airconditioning units, generators etc.)

NOTES

1. Material: Closed cell, chemically cross-linked high density rubber foam (with lower density center core), electro-galvanized steel plate
2. Maximum loading: 70 lbs/sq.in.
3. Working range: 15 to 60 lbs/sq.in.

FEATURES

- * Higher deflection than conventional rubber-cork and all
- * Closed cell construction with excellent sound attenuatic
- * No bolting required, simple field installation.
- * Free from sulphur, halogens, formaldehydes, phthalate:
- * Excellent resistance to oil, water and ozone (recommended for outdoor use)
- * Lifetime warranty against core separation.
- * 100% surface contact with equipment.
- * Higher deflection that single vibration isolation pads



Notes / Remarks :	Project :	Title : SRMP-xF Steel-Rubber Foam Mounting Pad	Drawing no. S-2200.33 Rev. 0
	Client :		
	Consultant :		
	Representative :		

