


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

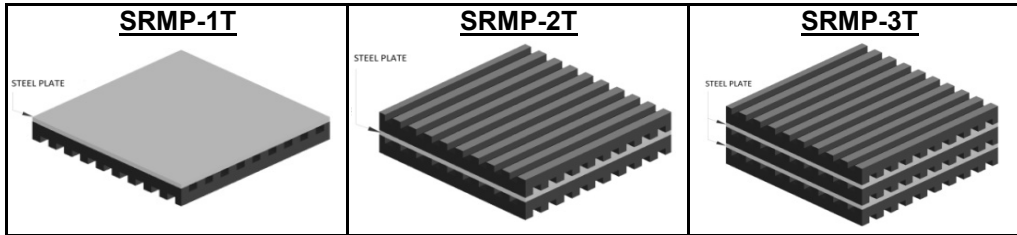

OPTION CODES: (option codes can be combined: e.g. *SRMP-2T-0404-FHQ*)

<p>Suffix code F</p> <p>1/4" top friction pad with steel separator plate (increases total thickness by 5/16")</p> <p>example: <i>SRMP-2T-0404-F</i></p>	<p>Suffix code H</p> <p>3/4" center hole for anchoring</p> <p>example: <i>SRMP-2T-0404-H</i></p>	<p>Suffix code Q</p> <p>1/4" top steel plate in lieu of standard 16 gauge (increases total thickness by 3/16")</p> <p>example: <i>SRMP-3T-0404-Q</i></p>
--	---	---

MODEL	SIZE (inches)	MAX DEFL. (inches)
SRMP-1T 1212	12" x 12" x 13/16"	0.18"
SRMP-1T 0808	8" x 8" x 13/16"	
SRMP-1T 0606	6" x 6" x 13/16"	
SRMP-1T 0404	4" x 4" x 13/16"	
SRMP-1T 0303	3" x 3" x 13/16"	
SRMP-2T 1212	12" x 12" x 1-9/16"	0.36"
SRMP-2T 0808	8" x 8" x 1-9/16"	
SRMP-2T 0606	6" x 6" x 1-9/16"	
SRMP-2T 0404	4" x 4" x 1-9/16"	
SRMP-2T 0303	3" x 3" x 1-9/16"	
SRMP-3T 1212	12" x 12" x 2-3/8"	0.54"
SRMP-3T 0808	8" x 8" x 2-3/8"	
SRMP-3T 0606	6" x 6" x 2-3/8"	
SRMP-3T 0404	4" x 4" x 2-3/8"	
SRMP-3T 0303	3" x 3" x 2-3/8"	
SRMP-sT ssss *	SPECIAL *	

* Contact factory for more than 3 vibration pad layers and non-standard sizes.

APPLICATION

- * Wherever bolting is to be avoided and minor, non-critical vibration conditions exist. (pumps, motors, airconditioning units, generators etc.)

NOTES

1. Material: High quality ozone and water resistant 55 duro elastomer blend, electro-galvanized steel plate
2. Maximum loading: 60 lbs/sq.in.
3. Working range: 15 to 55 lbs/sq.in.

FEATURES

- * Alternate high-low rib construction
- * No bolting required.
- * Simple field installation.
- * Higher deflection than single vibration isolation pads

Notes / Remarks :	Project :		Title : SRMP-xT Steel-Rubber Mounting Pad	Drawing no.
	Client :			S-2200.34
	Consultant :			
	Representative :			Rev. 0